


Micro Capillaries-Glass Ferrules

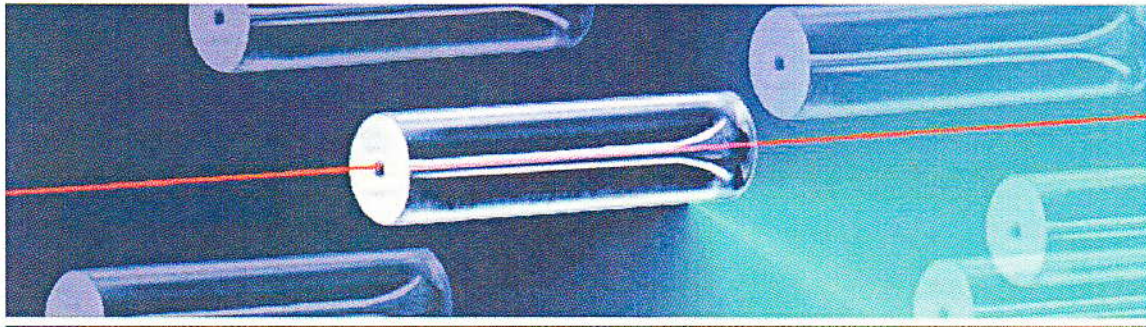


Features

- Good α matching with quartz-type fiber.
- High dimensional precision.
- High hardness and durability.
(Resistance to water and weather)
- High UV transmittance -> It is possible to use UV curable adhesive.
- Excellent polishing characteristic.

Application

- Fiber optic connector
- Fiber collimator
- Active/Passive device alignment
- Cable TV networks
- Fiber pigtail assemblies
- DWDM

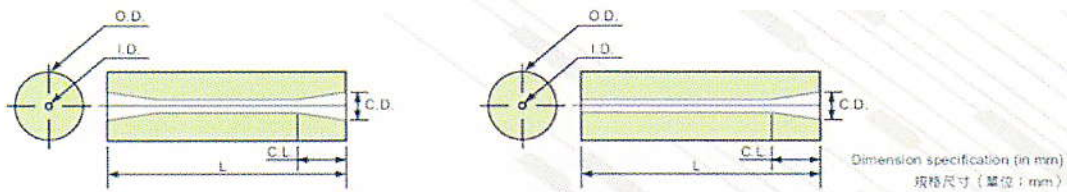

Item 項目	Outer diameter 外徑	Inner diameter 內徑	Length 長度	Concentricity 同心度	Roundness roundness 端內徑	Single cone C.D. V型導孔內徑	Single cone end depth C.L. V型導孔深度
Dual cone end 雙V導孔	1.800	0.126	10.5±0.2	Max.0.003	Max.0.001	1.1±0.2	1.5±0.5
Single cone end 單V導孔	1.250 ⁺⁰ _{-0.005}	0.127 ^{+0.001} ₋₀					

*The above products can be custom-made according to needs.

*以上產品，如需特殊規格，可依客戶需求訂製。